




1. Right-click on [EzUtility\\_5.04.exe](#) and tick ‘Run this program as an administrator’ in the pop-up menu. Complete the installation by double-clicking on the [EzUtility\\_5.04.exe](#).

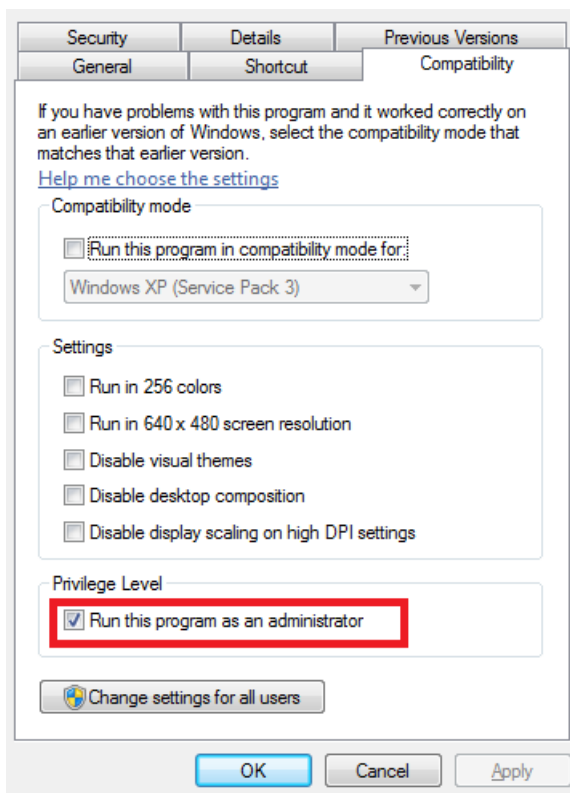

2. After successful installation, please also right-click on the shortcut icon of [Ez Utility](#) on the desktop and tick ‘Run this program as an administrator’ in the pop-up menu.




3. Connect the scanner and the host with USB cable.
4. Scan [\[.C008\\$\]USB-HID](#) below to switch to USB-HID interface.

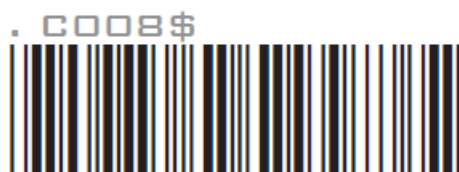


USB-HID



8. Click the Up Arrow on the Toolbar to upload configuration to the scanner.

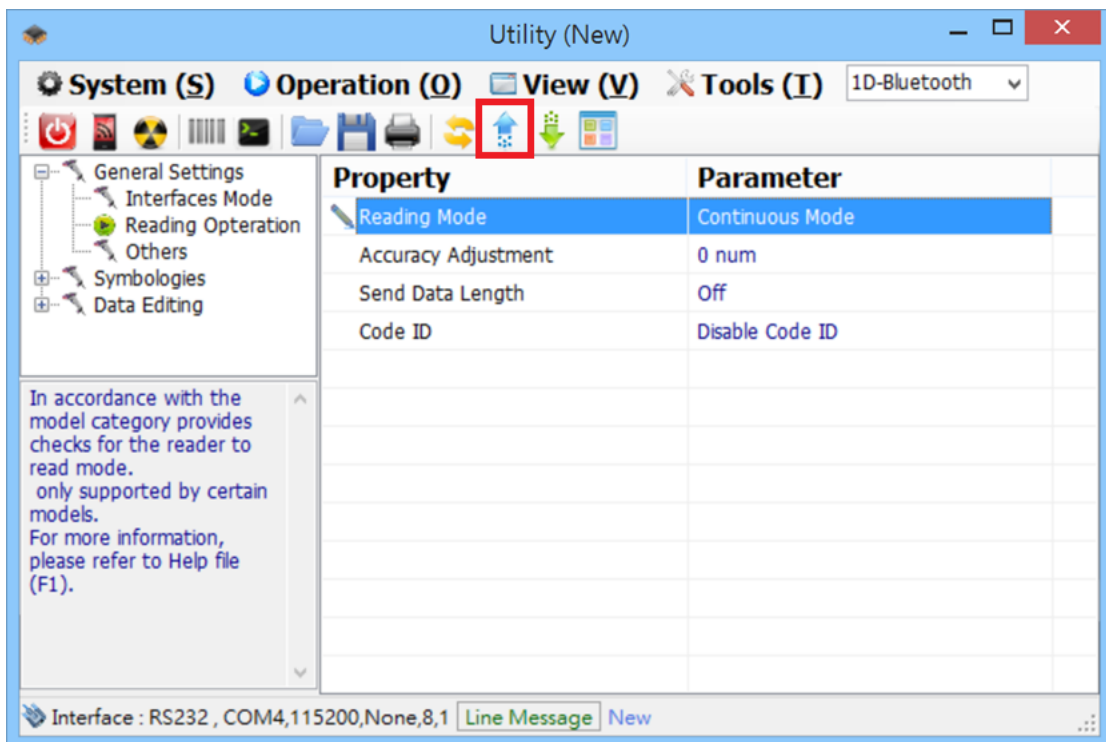


9. Below dialog indicates that your edited configuration is successfully uploaded to the scanner. Now you may disconnect cable from the scanner.




10. Scan any one of the barcodes below to reset the scanner back to the desired interface:




**BT HID**

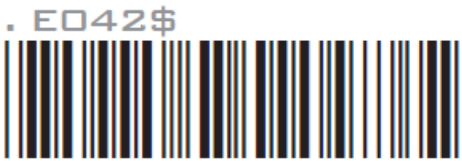


BT SPP

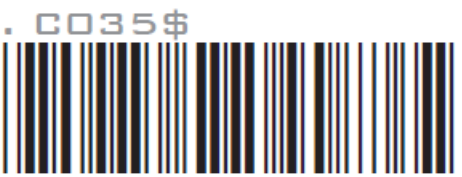

Memory Mode

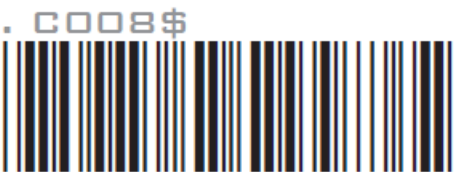

USB HID

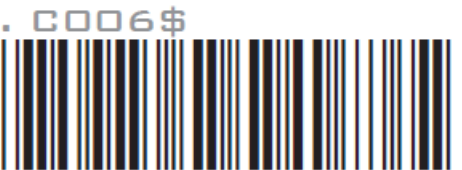

USB VCP