


AirTrack S1-W
CCD Bluetooth
Barcode Scanner
User Manual



Version

V1.0

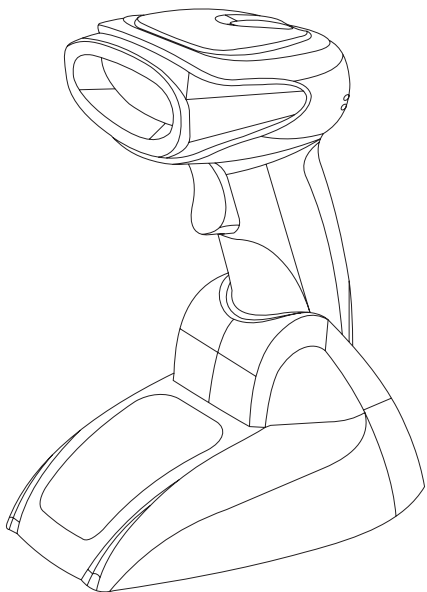

Start



Factory Default

How to set up the parameter:

- 1,Scan "Start"
- 2,Scan all necessary labels for parameters that meet your applications.
- 3,Scan "End"to end the programming.

An asterisk(*)next to an option indicate the default setting.

One Scanner Paired with One Receiver

Note:This Setting needn' t scan "Start" and "End" barcode, just scan 1-10 steps is OK.

- 1、Plug the Bluetooth receiver into PC
- 2,Factory Default



- 3,Enter Settings



- 4,Open one SPP Chanal



- 5、Disconnect previous connection



- 6、Scan the receiver's MAC code(The code is sticked on the receiver's case)



- 7、Auto reconnection



End



Start

- 8、Storage Bluetooth SPP setting



- 9、Finish Bluetooth SPP setting



- 10、IOS Transmission OFF



Suffix Setting



Enter



*Enter line feed



TAB



Line



Cancel

Customized Prefix & Suffix Settings

This section describes the alterations which can be made to the format of the transmitted data string. A prefix and suffix of maximum 10 direct input may be included in front and at the end of scanned barcode.



End



Start

Example to add a prefix or a suffix of "##":

- 1,Scan "Start" bar code



- 2,Scan "Add Prefix" or "Add Suffix" bar code



Add Prefix



Add Suffix

- 3,Scan Hex Appendix barcodes on page 2 associated with desired character from the table on the end of page 2.

- 4,Scan "Confirm configuration" bar code



- 5,Scan "END" bar code



USB-HID Languages Settings

Note:Languages settings do not scan "Start" "End" barcode,just scan the language bar code is OK.



USA



UK



France



End



Start



Belgium



Italy



Turkey-F



Germany



Spain

Sleep Time Setting



5 minutes



10 minutes



30 minutes



No Sleep



End



Start

Hex Appendix



1



2



3



4



5



6



7



8



9



0



A



B



C



D



E



F



End



Start



Confirm configuration



End

Bar Code Enable and Disable Setting



*Enable UPC-A



Disable UPC-A



*Enable UPC-E



Disable UPC-E



*Enable EAN-13



Disable EAN-13



*Enable EAN-8



Disable EAN-8



End



Start



*Enable Code 39



Disable Code 39



*Enable Codebar



Disable Codebar



*Enable Code 93



Disable Code 93



*Enable Code 128



Disable Code 128



Enable Interleaved 2 of 5



*Disable Interleaved 2 of 5



End



Start



Enable Industrial25



*Disable Industrial25



Enable Matrix 2 of 5



*Disable Matrix 2 of 5



Enable China Postal



*Disable China Postal



End

Hex	Char
00	NUL (Null char.)
01	SOH (Start of Header)
02	STX (Start of Text)
03	ETX (End of Text)
04	EOT (End of Transmission)
05	ENQ (Enquiry)
06	ACK (Acknowledgment)
07	BEL (Bell)
08	BS (Backspace)
09	HT (Horizontal Tab)
0a	LF (Line Feed)
0b	VT (Vertical Tab)
0c	FF (Form Feed)
0d	CR (Carriage Return)
0e	SO (Shift Out)
0f	SI (Shift In)
10	DLE (Data Link Escape)
11	DC1 (XON) (Device Control 1)
12	DC2 (Device Control 2)
13	DC3 (XOFF) (Device Control 3)
14	DC4 (Device Control 4)
15	NAK (Negative Acknowledgment)
16	SYN (Synchronous Idle)
17	ETB (End of Trans. Block)
18	CAN (Cancel)
19	EM (End of Medium)
1a	SUB (Substitute)
1b	ESC (Escape)
1c	FS (File Separator)
1d	GS (Group Separator)
1e	RS (Request to Send)
1f	US (Unit Separator)
20	SP (Space)
21	! (Exclamation Mark)
22	" (Double Quote)
23	# (Number Sign)
24	\$ (Dollar Sign)
25	% (Percent)
26	& (Ampersand)
27	' (Single Quote)
28	((Right / Closing Parenthesis)
29) (Right / Closing Parenthesis)
2a	* (Asterisk)
2b	+ (Plus)
2c	, (Comma)
2d	- (Minus / Dash)
2e	• (Dot)
2f	/ (Forward Slash)
30	0
31	1
32	2
33	3
34	4
35	5
36	6
37	7
38	8
39	9
3a	: (Colon)
3b	; (Semi-colon)
3c	< (Less Than)
3d	= (Equal Sign)
3e	> (Greater Than)
3f	? (Question Mark)

	Char
40	@ (AT Symbol)
41	A
42	B
43	C
44	D
45	E
46	F
47	G
48	H
49	I
4a	J
4b	K
4c	L
4d	M
4e	N
4f	O
50	P
51	Q
52	R
53	S
54	T
55	U
56	V
57	W
58	X
59	Y
5a	Z
5b	[(Left / Opening Bracket)
5c	\ (Back Slash)
5d] (Right / Closing Bracket)
5e	^ (Caret / Circumflex)
5f	_ (Underscore)
60	' (Grave Accent)
61	a
62	b
63	c
64	d
65	e
66	f
67	g
68	h
69	i
6a	j
6b	k
6c	l
6d	m
6e	n
6f	o
70	p
71	q
72	r
73	s
74	t
75	u
76	v
77	w
78	x
79	y
7a	z
7b	{ (Left/ Opening Brace)
7c	(Vertical Bar)
7d	} (Right/Closing Brace)
7e	~ (Tilde)
7f	DEL (Delete)